


TECHNICAL SPECIFICATIONS

MODEL	u.m.	50P	170R
Capacity			
1 st speed	m ³ /h	150	300
2 nd speed	m ³ /h	350	700
3 rd speed	m ³ /h	550	1200
Noise			
1 st speed	dB	37	38
2 nd speed	dB	40	41
3 rd speed	dB	50	51
Consumption	W	95	125
Power input	V-Hz	230 - 50/60	230 - 50/60
Dimensions AxBxC	mm	370x302x548	468x303x840
Weight	Kg	20	30
Cells	n°	1	1
Installation		free-standing	wheel-mounted
Remote control		yes	yes

PRO LIFE SERIES

50P
170R

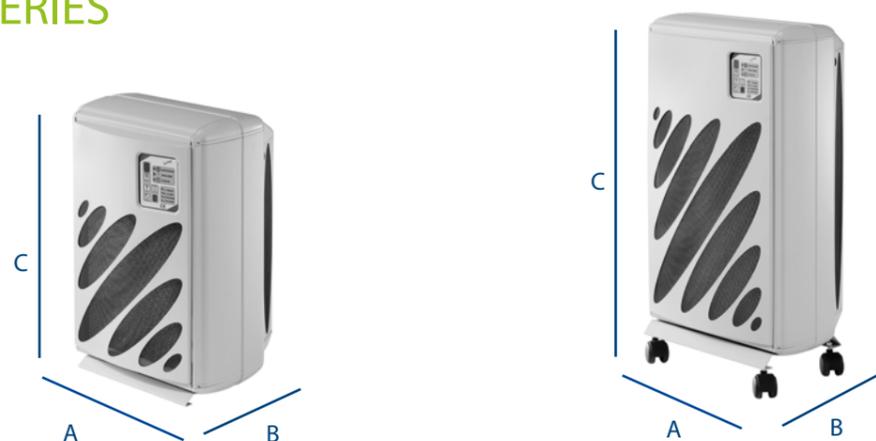

CERTIFICATIONS

ILH BERLIN
INSTITUT FÜR LUFTHYGIENE

BSRIA



CETIAT
ensemble, innover et valider



Standard UNI 11254



expansion[®]
electronic
BETTER AIR FOR A BETTER QUALITY OF LIFE

EXPANSION ELECTRONIC SRL · Via delle Industrie, 18 · 36050 Cartigliano (VI) · ITALY
T. +39 0424 592400 · +39 0424 827058 · +39 0424 827059 · F. +39 0424 827061
www.expansion-electronic.com · info@expansion-electronic.com

expansion[®]
electronic

BETTER AIR FOR A BETTER QUALITY OF LIFE

PROLIFE

50P
170R



DESCRIPTION

The PROLIFE series has been designed for those who, in their domestic and professional surroundings, require an instrument that is essential for the safeguard of their health and well-being. The PROLIFE series includes two models whose main characteristics are convenience and versatility.

50P and 170R can be used anywhere to satisfy the needs of demanding customers as it can be easily moved from one room to another without the need for installation.

50P is a free-standing model while 170R is a portable wheel-mounted model.

Both models feature an aluminium structure which can be finished in an extensive range of colours on request.

The simple and user-friendly infrared remote control, standard supplied, is used to select one of the three operating speeds just with a press of the button.

RESIDENTIAL
SOLUTIONS

TECHNOLOGIES

OUR THREE LEVELS OF TECHNOLOGY



NATURE SYSTEM®

NATURE SYSTEM® technology incorporates the most complete and evolved air treatment system, as can be found in the RIVITALIZZATORE®.

Given that the atmosphere contains a variable number of sources of pollution, with the RIVITALIZZATORE® the daytime or night-time operating cycle can be selected.

After the operating function has been set, it can automatically control and manage all the operating phases required to achieve the finest air quality. In the daytime cycle, it alternates the purification phase with the revitalisation phase at regular intervals, programmed according to operating speed, while in the night-time cycle just the revitalisation phase is performed. The control panel constantly displays the function performed and reports any faults and when maintenance is required.

If filtration is not ideal during the daytime cycle, the system automatically activates the ventilation only phase and disables all the others.

The RIVITALIZZATORE® is ideal for city dwellers who wish to experience the emotion of breathing air that is similar to that in natural uncontaminated environments.



AFC SYSTEM®

In air purification, AFC® technology symbolises the tradition of EXPANSION ELETRONIC.

Its microprocessor independently controls the performance of the electrostatic cell that automatically adjusts the filtration level to the specific operating condition.

The information is managed via the control panel. This makes it possible to change the conditions of use at any time, report any faults and signal when the electrostatic cells must be cleaned. To protect the electronic parts of the machine and constantly assure total reliability, the system automatically stops if the required operation is not performed.

In other words, the AFC® system guarantees that optimal performance is constantly maintained whilst minimising external interventions.

All the user has to do is to switch on and select the most appropriate speed for his/her requirements because everything else is done by the machine.



BASIC SYSTEM

BASIC SYSTEM technology identifies traditional air purification systems with electrostatic filters. This technology is used by all the manufacturers in the sector. Unlike other technologies, its efficiency is not constant as the dirtier the filter gets, the more air filtering performance level lowers, though this takes place gradually.

This technology is the simplest and earliest version of electrostatic filtration and works with standard applications and management systems. The information managed by the electronic circuit and displayed on the control panel only shows the basic functions.



PERFORMANCE 50P - 170R



EQUIPMENT, PERFORMANCE AND CONTROLS	NATURE SYSTEM*	AFC SYSTEM*	BASIC SYSTEM
Built-in humidity sensor		-	-
Dual voltage electrostatic filtering (by Expansion Electronic)			
CPU for real-time function management			-
Filtering performance control and management			-
Control and management of automatic daytime ionic balance (ideal microclimate)		-	-
Control and management of night-time deodorisation with negative ions		-	-
Control and management of the reduction in the daytime environmental bacterial level	-77%	-55%	-30%
Control and management of the reduction in the night-time environmental bacterial level	-92%	-	-
Control and management of the reduction in daytime and night-time environmental mould	-98%	-40%	-32%
Control and management of the reduction in environmental electrostatic charges	-99%	-	-25%
Control and management of ozone emissions according to EN60335-2-65:2003-07	<1 ppm (limit 5ppm)	<1 ppm (limit 5ppm)	<1 ppm (limit 5ppm)
Automatic control and management of the quantity of daytime negative ion emissions		-	-
Automatic control and management of the quantity of night-time negative ion emissions		-	-
Performance tolerance	±1%	±1%	±9%
Activation of functions using the IR remote control			
Automatic restart following a power blackout			
Control LED check-up button			-
Alarm light for routine maintenance			
Pre-alarm light for routine maintenance			-
Fault warning light			
Filtration performance warning light			-
Negative ion emitter electrode/s in special wear-resistant alloy		-	
Warranty on electronic components (for manufacturing defects)	3 years	3 years	2 years
Warranty on the motor/s (for manufacturing defects)	3 years	3 years	3 years
1 st speed filtration performance (on PM2.5)	99% constant	99% constant	95% inconstant
2 nd speed filtration performance (on PM2.5)	98% constant	98% constant	89% inconstant
3 rd speed filtration performance (on PM2.5)	96% constant	96% constant	86% inconstant

OPTIONS

- Activated carbon filter;
- Extensive RAL colour range.